

# ВЫВОДНОЙ СВЕТОДИОД КРУГЛЫЙ

**ARL-5013URBC-B**

## FEATURES

- Two chips are matched for uniform light output, wide viewing angle.
- Long life-solid state reliability.
- I.C. compatible.
- Low power consumption.
- Pb free.

## DESCRIPTIONS

- The LED lamps contain two integral chips and are available as both bicolor and bipolar types.
- The Bright Red and Green light is emitted by diodes of GaAsP/GaP and GaAsP/GaP respectively.
- Type of bipolar lamps are both White Diffused and Color Diffused while the bicolor are White Diffused.

## APPLICATIONS

- Status indicators.
- Commercial use.
- Advertising signs.
- Back lighting.

## DEVICE SELECTION GUIDE


LED Part No.	CHIP		Lens Color
	Material	Emitted Color	
ARL-5013URBC-B	AlGaInP	Red	Water Clear
	InGaN	Blue	



5 mm



CLEAR

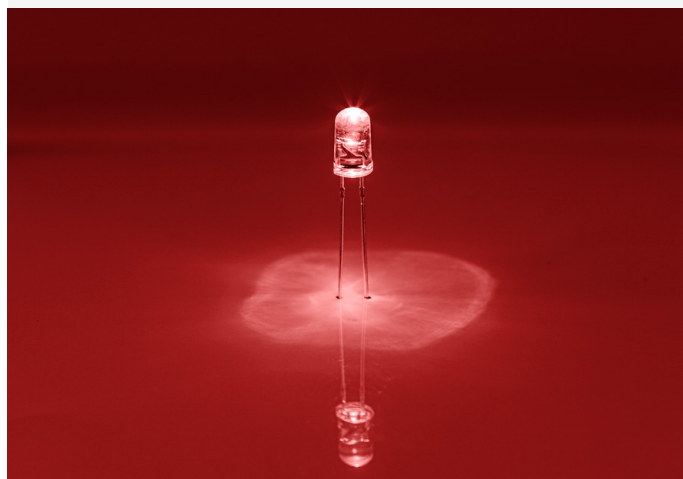

### USAGE NOTES:


The ultra bright LED is an electrostatic insensitive device, so static electricity and surge will damage the LED. It is required to wear a wrist-band when handling the LED. All device, equipment, machinery, desk and ground must be properly grounded.

When using LED, it must use a protective resistor in series with DC current about 20 mA.



**ATTENTION!**  
ELECTROSTATIC SENSITIVE DEVICES.  
OBSERVE PRECAUTIONS FOR HANDLING.

## PACKAGE DIMENSIONS

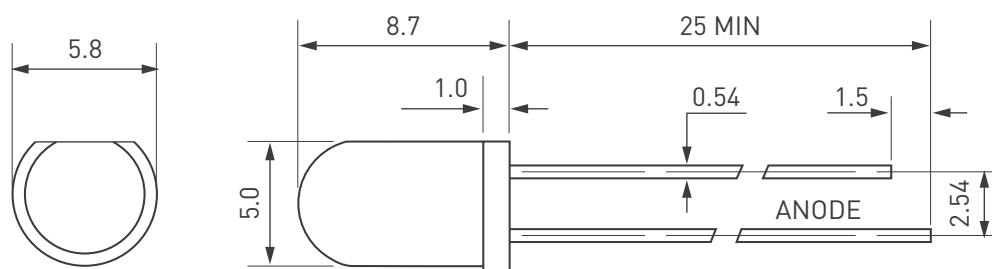

Unit: mm.

### Notes:

Other dimensions are in millimeters, tolerance is 0.25 mm except being specified.

Protruded resin under flange is 1.5 mm, Max LED.

Bare copper alloy is exposed at tie-bar portion after cutting.

## ABSOLUTE MAXIMUM RATING ( $T_A = +25^\circ\text{C}$ )

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Pulse Current	$I_{FPM}$	70	mA
Forward Current	$I_{FM}$	30	mA
Reverse Voltage	$V_R$	5	V
Power Dissipation	$P_D$	140	mW
Operating Temperature	$T_{opr}$	-40... +80	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40... +100	$^\circ\text{C}$
Soldering Heat (5s)	$T_{sol}$	260	$^\circ\text{C}$

## ELECTRO-OPTICAL CHARACTERISTICS ( $T_A = +25^\circ\text{C}$ )







Parameter	Symbol	Device	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	$I_v$	Red	2500	—	4500	mcd	$I_f=20\text{mA}$
		Blue	2000	—	3000		
Viewing Angle	$2\theta_{1/2}$	Red	40	—	50	Deg	(Note 1)
		Blue					
Peak Emission Wavelength	$\lambda_p$	Red	620	625	630	nm	$I_f=20\text{mA}$
		Blue	460	465	470		
Spectral Line Half-Width	$\Delta\lambda$	Red	25	30	35	nm	$I_f=20\text{mA}$
		Blue	30	35	40		
Forward Voltage	$V_F$	Red	3.0	—	5.0	V	$I_f=20\text{mA}$
		Blue					
Reverse Current	$I_R$	Red	—	—	10	$\mu\text{A}$	$V_R=5\text{V}$
		Blue					

### Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

2.  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

# TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVES

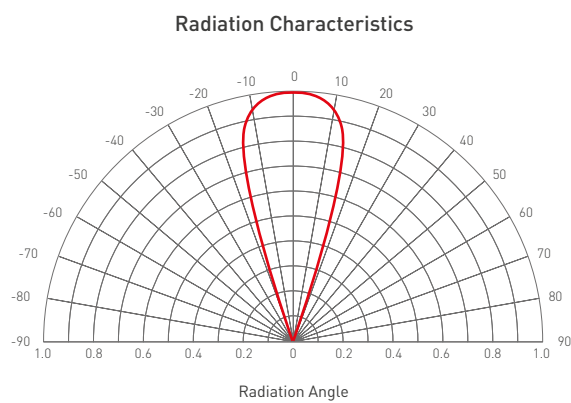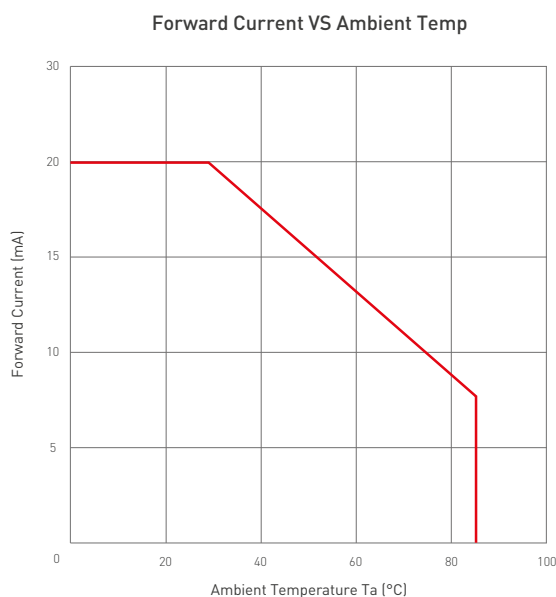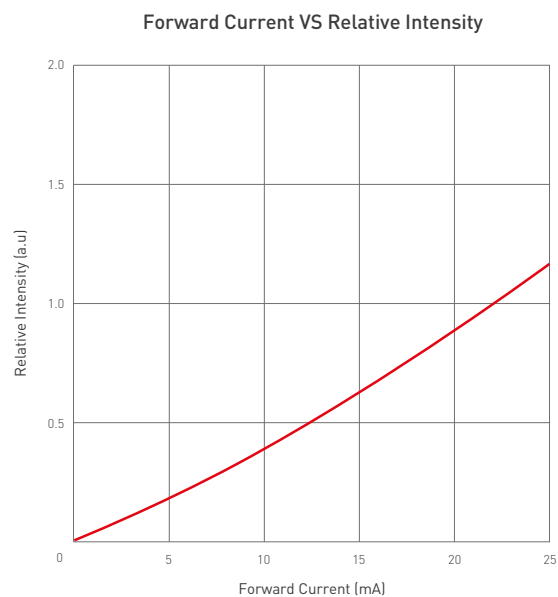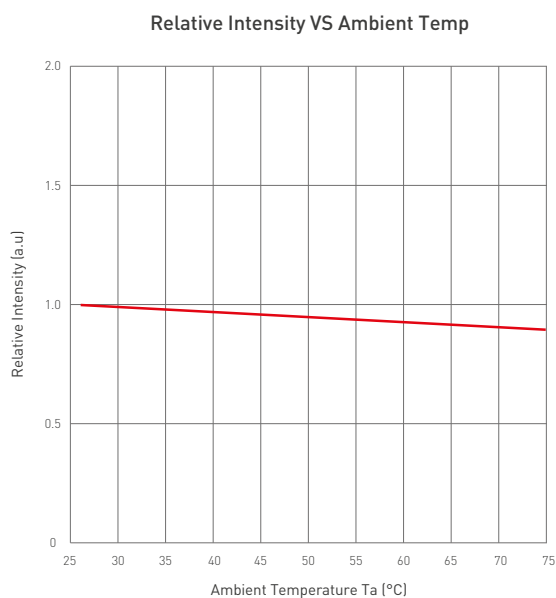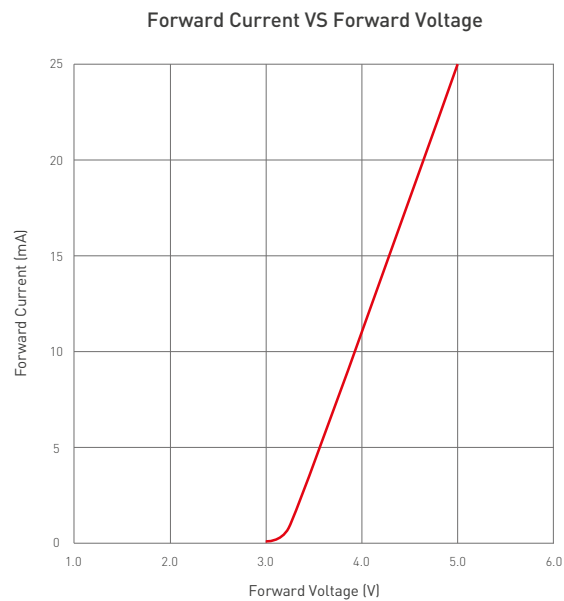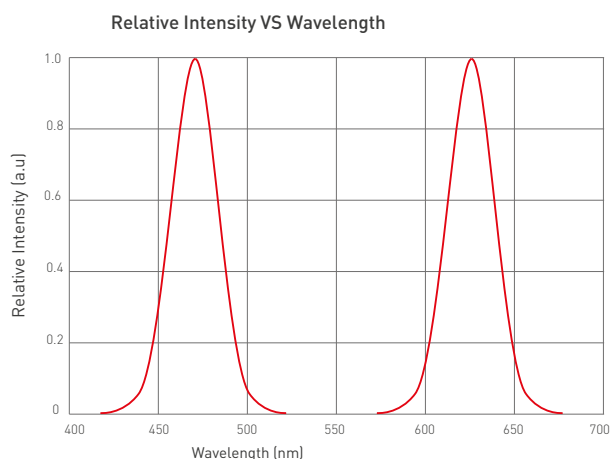

## NOTES

1. Above specification may be changed without notice. Will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. Assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of the corporation. Please don't reproduce or cause anyone to reproduce them without consent.